



# CR97/U-Series Specifications



**0.435L x 0.183W x 0.530H (in)**

PDI MIL-PRF-3098 Qualified Product List (QPL) crystals are available in both standard or custom frequencies to provide precision timing in a resistance welded HC-49 package.

ex) **CR—97—/U—9M000000**

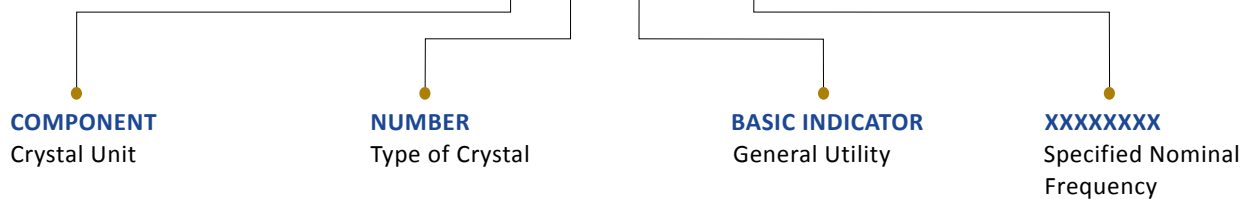

| Parameter                       |                             | Frequency Range       | Units |
|---------------------------------|-----------------------------|-----------------------|-------|
|                                 |                             | 8.000000 to 10.000000 | MHz   |
| Mode of Oscillation             |                             | Fundamental           |       |
| Equivalent Series Resistance    | Max                         | 35                    | Ω     |
| Operating Temperature Range     |                             | -40 to +85            | °C    |
| Frequency Tolerance (Inclusive) | Operating Temperature Range | ±50                   | ppm   |
| Drive Level                     | Max                         | 1.0                   | mW    |
| Seal Method                     | Resistance Weld             |                       |       |
| Shunt Capacitance (C0)          | Max                         | 7.0                   | pF    |

| Environmental Specifications                      |                                        |     | Units |
|---------------------------------------------------|----------------------------------------|-----|-------|
| Shock                                             | Frequency Change Permitted             | ±5  | ppm   |
|                                                   | Equivalent Resistance Change Permitted | ±10 | %     |
| Vibration<br>MIL-STD-202, Method 204, Condition A | Frequency Change Permitted             | ±5  | ppm   |
|                                                   | Equivalent Resistance Change Permitted | ±10 | %     |
| Thermal Shock                                     | Frequency Change Permitted             | ±5  | ppm   |
|                                                   | Equivalent Resistance Change Permitted | ±10 | %     |
| Aging                                             | Frequency Change Permitted             | ±5  | ppm   |

The product described in this spec. consist of this specification and MIL-PRF-3098.

Decimal XXX = ± .008, XX = ± .020 Metric [XXX = ± .20], [XX = ± .50]

## MIL-PRF-3098 w/Amendment 1

## Table VI, Group B Inspection for Product Level B Crystals

| Subgroup I 1/                                   | Requirement Paragraph | Method Paragraph |
|-------------------------------------------------|-----------------------|------------------|
| Solderability                                   | 3.7                   | 4.10.3           |
| Resistance to solvents (4 sample units)         | 3.8                   | 4.10.4           |
| Shock (Specified pulse)                         | 3.17                  | 4.10.13          |
| Vibration                                       | 3.19.1                | 4.10.15.1        |
| Thermal shock                                   | 3.23                  | 4.10.19.1        |
| Seal                                            | 3.24                  | 4.10.26          |
| Salt atmosphere (Corrosion)                     | 3.27                  | 4.10.21          |
| Moisture resistance                             | 3.28                  | 4.10.22          |
| Terminal strength 2/                            | 3.30                  | 4.10.23          |
| Visual and mechanical examination (Internal) 2/ | 3.5, 3.6, 3.35        | 4.10.2.2         |
| Bond strength (When specified) 2/               | 3.31                  | 4.10.24          |
| <b>Subgroup II 3/</b>                           |                       |                  |
| Insulation resistance                           | 3.14                  | 4.10.10          |
| Aging                                           | 3.29                  | 4.10.27.1        |

1/ If the contractor can demonstrate that any of these tests have been performed for three consecutive periods with zero failures, the frequency of this test, with the approval of the qualifying activity, can be performed every 36 months. If the design, material, construction, or processing of the crystal units change, or if there are any quality problems or failures, the qualifying activity may require resumption of the original test frequency.

2/ Only two units are required. These two samples units shall be subjected to terminal strength, visual and mechanical (Internal), and bond strength (When specified see 3.1).

3/ If the contractor can demonstrate that any of these tests have been performed for six consecutive periods with zero failures, the frequency of this test, with the approval of the qualifying activity, can be performed every 36 months. If the design, material, construction, or processing of the crystal units change, or if there are any quality problems or failures, the qualifying activity may require resumption of the original test frequency.

## PACKAGE DIMENSIONS

